

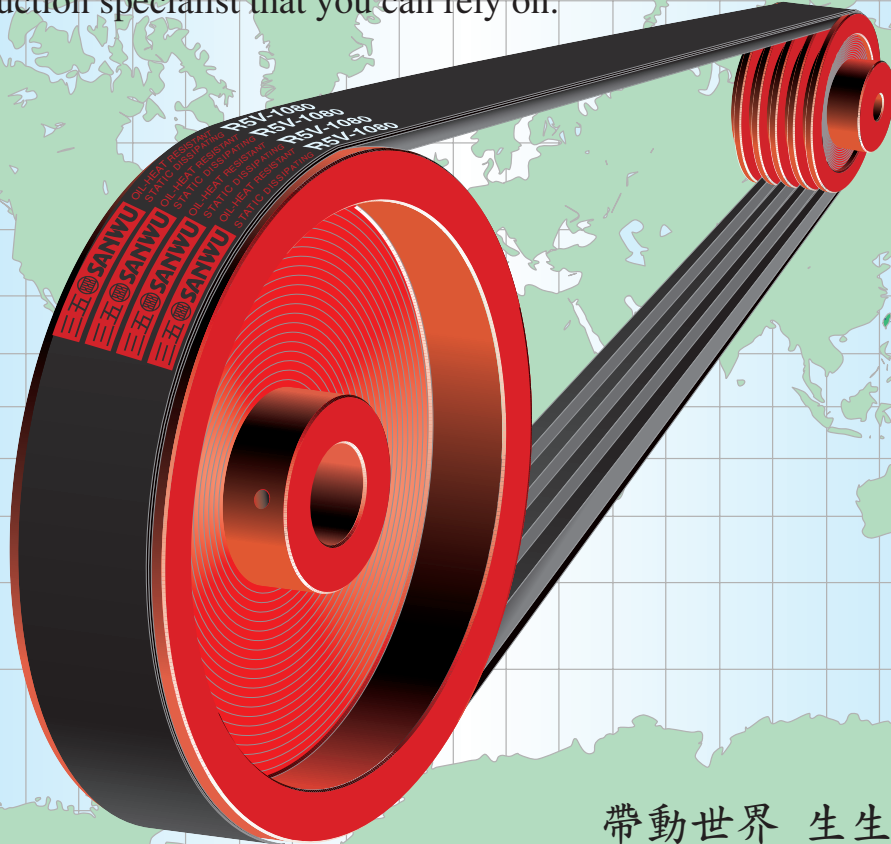
動力傳動用橡膠帶

POWER TRANSMISSION BELTS

ISO 9001:2000 REGISTERED . ISO 14001 CERTIFICATE

專業製造 值得信賴

A production specialist that you can rely on.



帶動世界 生生不息
Lead the world to run forever.

三五  **SWR**



目次	型 式	頁次
1. 一般工業用三角帶	Multiple Standard V-Belts/A,B,C,D,E.....	02
2. 輕馬力用三角帶	Light Duty & F.H.P V-Belts/K,M,3L,4L,5L	04
3. 包布型高馬力用三角帶	Heavy Duty Wedge V-Belts/3V,5V,8V	05
5. SP系列高馬力用三角帶	SP-Series Metric V-Belts/SPZ,SPA,SPB,SPC	07
6. 切邊型高馬力用三角帶	Raw Edge Wedge V-Belts/3V,5V,SPZ,SPA,SPB,SPC	09
7. 切邊齒型三角帶	Raw Edge Cogged Wedge V-Belts/3VX,5VX,XPZ,XPA,XPB,XPC ...	09
8. 聯體帶	Banded V-Belts/A,B,C,D,E,3V,5V,8V,SPZ,SPA,SPB,SPC	10
9. 汽車用三角帶	Automotive V-Belts/SWF,SRL,SRC	11
10. 汽車用多槽皮帶	V-Ribbed Belts for Automotive/PK	13
11. 機車用變速帶	VS Belts for Motorcycle/SRCV	14
12. 變速帶	Variable Speed Cogged V-Belts/VS	15
13. 多槽皮帶	V-Ribbed Belts/H,J,L,M	17
14. 六角帶	Double V-Belts/AA,BB,CC	19
15. 保管與使用	Storage & Operation	20
16. 註冊商標與其他製品	Trade Marks & Other Products	21

從1946年創業迄今，三五製造橡膠帶有五十
年以上的歷史。於追求技術創新永續經營之
餘，仍保有對大自然之愛心。

1994年榮獲ISO9002認證

1998年榮獲ISO14001認證


2002年榮獲ISO9001認證

San Wu, founded in 1946, owns experience in
producing various rubber belts for over 50 years.
Expect pursuing innovation of new technology
and permanent business activities, we always
remain our love to this beautiful nature.

Award the Certificate of ISO-9002 in 1994.

Award the Certificate of ISO-14001 in 1998.

Award the Certificate of ISO-9001 in 2002.

**SWR****MULTIPLE STANDARD V-BELT/A, B, C, D, E****一般工業用三角帶 /A, B, C, D, E****CROSS SECTION**

Dimensions	A	B	C	D	E
a (mm)	12.5	16.5	22.0	31.5	38.0
b (mm)	9.0	11.0	14.0	19.0	25.5
θ (°)	40	40	40	40	40

標誌與特點 Belt Labels and Features**白牌標誌：White label**

符合國家標準(CNS 745 K4003)，具耐油耐熱性，在常態之使用條件下，最能發揮傳動效率。

In comply with the requires of our National Standard (CNS 745 K4003) as well as with the features of Oil & Heat Resistance, our belts can run efficiently even under the condition of mild heat and oil.

**紅牌標誌：Red label**

具耐油、耐熱及耐磨特性，適合高速傳動的用途。在攝氏90度的高溫環境中使用，能發揮高傳動效率。

With the features of Oil-resistance, Heat-resistance & Abrasion-resistance, our belts are suitable to be run at very high speed and a good transmitting efficiency also can be reached even they are operated at the temperature of 90°C.

**綠牌標誌：Green label**

外銷專用標誌。

Same class with the belts in white label are specially made for exportation.

**適用最小輪徑 Min. Pulley Diameter**

A	B	C	D	E
75mm	125mm	200mm	300mm	450mm

外銷最少訂量 Min. Quantity for Export-pcs

A	B	C	D	E
150	100	60	20	20

**標準尺寸 Standard Size Range**

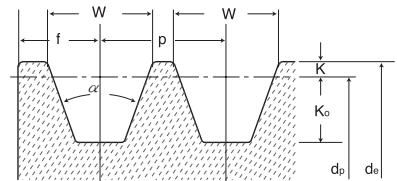
公稱帶號 (有效周長) Nominal Length Pitch Length(inch)	標準尺寸 Standard Size				
	A Type	B Type	C Type	D Type	E Type
14					
15					
20					
25					
27					
30					
35					
38					
40					
45					
48					
55					
65					
78					
85					
90					
100					
105					
115					
120					
135					
140					
160					
180					
195					
210					
242					
278					
330					
360					
425					
480					
600					

* 其他尺寸亦可供應。


Other sizes also available.

* 皮帶可切成齒型提昇屈曲性能，以使用更小帶輪。

Can notch belts into Cog shapes to enhance their flexibility so that belt can be run in the pulley with a smaller diameter.

**標準滑輪 Standard Pulley Dimension**

Belt Types	de(mm)	α°	w(mm)	k(mm)	ko(mm)	p(mm)	f(mm)
A	71~100	34	9.2	4.5	8.0	15.0	10.0
	101~125	36					
	126~ up	38					
B	125~160	34	12.5	5.5	9.5	19.0	12.5
	161~200	36					
	201~ up	38					
C	200~250	34	16.9	7.0	12.0	25.5	17.0
	251~315	36					
	316~ up	38					
D	355~450	36	24.6	9.5	15.5	37.0	24.0
	451~ up	38					
E	500~630	36	28.7	12.7	19.3	44.5	29.0
	631~ up	38					

**SWR****LIGHT DUTY & F.H.P.V-BELTS / K, M, 3L, 4L, 5L****輕馬力用三角帶 / K, M, 3L, 4L, 5L****CROSS SECTION**

Dimensions	K	M	3L	4L	5L
a (mm)	7.5	10.0	10.5	12.5	16.5
b (mm)	6.0	5.5	5.5	8.0	9.5
θ (°)	40	40	40	40	40

規格標示 SIZE MARK

example: K-20



example: 3L-310

**標準尺寸 Standard Size Range**

公稱帶號(外周長)		標準尺寸 Standard Size				
Nominal Length Outside Length(inch)		K Type	M Type	3L Type	4L Type	5L Type
K,M	3L,4L,5L					
11	110					
13	130					
14	140					
17	170					
20	200					
23	230					
25	250					
30	300					
38	380					
43	430					
55	550					
62	620					
75	750					
82	820					
95	950					
100	1000					
125	1250					
140	1400					
155	1550					

* 其他尺寸亦可供應。 Other sizes also available.

* 外銷最少訂量。 Min. Quantity for Export (pcs):K...200,M...150, 3L...150, 4L...100, 5L...100

* Belt Inside Length = Outside Length-r (inch)

r值:K...1.5, M...1.5, 3L...1.5, 4L...2.0, 5L...2.5

用途：

家用洗衣機 縫衣機

洗碗機

風扇、鼓風機

離心式唧筒

割草機、庭園設備、其他

Applications:

Household Washers

Dish Washers

Fan & Blowers

Centrifugal Pumps


Lawn & Garden Equipment and other Light Duty Drives

適用最小輪徑 Min Pulley Diameter

K	M	3L	4L	5L
45mm	38mm	38mm	60mm	85mm

**SWR****HEAVY DUTY WEDGE V-BELTS / 3V, 5V, 8V**

包布型高馬力用三角帶 / 3V, 5V, 8V

美國標準規格 *RMA / MPTA***CROSS SECTION**

Dimensions	3V/9N	5V/15N	8V/25N
a (mm)	9.5	15.9	25.4
b (mm)	8.0	13.5	23.0
θ (°)	40	40	40

3V/9N		5V/15N		8V/25N	
帶號 Belt Type	外周長 Outside Length(mm)	帶號 Belt Type	外周長 Outside Length(mm)	帶號 Belt Type	外周長 Outside Length(mm)
3V250	635	5V500	1270	8V1000	2540
3V265	673	5V530	1346	8V1060	2692
3V280	711	5V560	1422	8V1120	2845
3V300	762	5V600	1524	8V1180	2997
3V315	800	5V630	1600	8V1250	3175
3V335	851	5V670	1702	8V1320	3353
3V355	902	5V710	1803	8V1400	3556
3V375	953	5V750	1905	8V1500	3810
3V400	1016	5V800	2032	8V1600	4064
3V425	1080	5V850	2159	8V1700	4318
3V450	1143	5V900	2286	8V1800	4572
3V475	1207	5V950	2413	8V1900	4826
3V500	1270	5V1000	2540	8V2000	5080
3V530	1346	5V1060	2692	8V2120	5385
3V560	1422	5V1120	2845	8V2240	5690
3V600	1524	5V1180	2997	8V2360	5994
3V630	1600	5V1250	3175	8V2500	6350
3V670	1702	5V1320	3353	8V2650	6731
3V710	1803	5V1400	3556	8V2800	7112
3V750	1905	5V1500	3810	8V3000	7620
3V800	2032	5V1600	4064	8V3150	8001
3V850	2159	5V1700	4318	8V3350	8509
3V900	2286	5V1800	4572	8V3550	9017
3V950	2413	5V1900	4826	8V3750	9525
3V1000	2540	5V2000	5080	8V4000	10160
3V1060	2692	5V2120	5385	8V4250	10795
3V1120	2845	5V2240	5690	8V4500	11430
3V1180	2997	5V2360	5994	8V4750	12065
3V1250	3175	5V2500	6350	8V5000	12700
3V1320	3353	5V2650	6731	8V5600	14224
3V1400	3556	5V2800	7112		
		5V3000	7620		
		5V3150	8001		
		5V3350	8509		
		5V3550	9017		

* 其他尺寸亦可供應。

Other sizes also available.

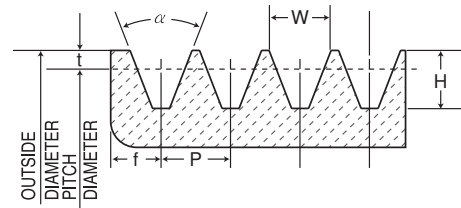
**SWR****HEAVY DUTY WEDGE V-BELTS / 3V, 5V, 8V***High Capacity Narrow Wrapped V-Belt**American Standard Sizes To RMA / MPTA***規格標示 SIZE MARK**

example: 3V - 250

外周長(25")

Outside length in 1/10" (25")

型別 Belt Type

**標準滑輪規格 Standard Pulley Dimension**


型 別 Belt Type	外 徑 Outside Dia mm	輪槽角度 Groove Angle α ($\pm 1/4^\circ$)	輪槽寬度 Groove Width W ($\pm 0.13\text{mm}$)	輪槽深度 Groove Depth H (+0.2, -0.0)	t mm	輪槽間距 Groove Pitch P ($\pm 0.4\text{mm}$)	f mm
3V 9N	→90 91→150 151→300 300 over	36 38 40 42	8.9	9.0	0.6	10.3	8.7
5V 15N	→250 251→400 400 over	38 40 42	15.2	15.0	1.3	17.5	12.7
8V 25N	→400 401→570 570 over	38 40 42	25.4	25.0	2.5	28.6	19

適用最小輪徑 Min. Pulley Diameter

3V/9N	5V/15N	8V/25N
75mm	180mm	300mm

外銷最少訂量 Min. Quantity for Export-pcs

3V/9N	5V/15N	8V/25N
150	100	20

**SWR****SP-SERIES METRIC V-BELTS**包布型高馬力用三角帶 / *SPZ, SPA, SPB, SPC*歐洲標準規格 / *DIN7753 Part1***CROSS SECTION**

Dimensions	SPZ	SPA	SPB	SPC
a (mm)	10	13	16	22
b (mm)	8	10	13	18
θ (°)	40	40	40	40

SPZ			
有效周長 Pitch Length mm	外 周 長 Outside Length mm	有效周長 Pitch Length mm	外 周 長 Outside Length mm
562	575	1212	1225
587	600	1237	1250
612	625	1250	1263
630	643	1262	1275
637	650	1287	1300
662	675	1312	1325
670	683	1320	1333
687	700	1337	1350
710	723	1362	1375
722	735	1387	1400
737	750	1400	1413
750	763	1412	1425
762	775	1437	1450
772	785	1462	1475
787	800	1487	1500
800	813	1500	1513
812	825	1512	1525
825	838	1537	1550
837	850	1562	1575
850	863	1587	1600
862	875	1600	1613
875	888	1612	1625
887	900	1637	1650
900	913	1662	1675
912	925	1687	1700
925	938	1700	1713
937	950	1737	1750
950	963	1762	1775
962	975	1800	1813
987	1000	1837	1850
1000	1013	1862	1875
1012	1025	1887	1900
1024	1037	1900	1913
1037	1050	2000	2013
1047	1060	2120	2133
1060	1073	2240	2253
1080	1090	2360	2375
1087	1100	2500	2513
1112	1125	2650	2663
1120	1133	2800	2813
1137	1150	3000	3013
1162	1175	3150	3163
1180	1193	3350	3363
1187	1200	3550	3563
1200	1213		

SPA			
有效周長 Pitch Length mm	外 周 長 Outside Length mm	有效周長 Pitch Length mm	外 周 長 Outside Length mm
732	750	1600	1618
757	775	1607	1625
782	800	1632	1650
800	818	1657	1675
807	825	1682	1700
832	850	1700	1718
850	868	1707	1725
857	875	1732	1750
882	900	1782	1800
900	918	1800	1818
907	925	1807	1825
932	950	1832	1850
950	968	1857	1875
957	975	1882	1900
982	1000	1900	1918
1000	1018	1907	1925
1007	1025	1932	1950
1032	1050	1982	2000
1060	1078	2000	2018
1082	1100	2082	2100
1107	1125	2120	2138
1120	1138	2132	2150
1132	1150	2232	2250
1157	1175	2240	2258
1180	1198	2307	2325
1207	1225	2360	2378
1232	1250	2432	2450
1250	1268	2482	2500
1257	1275	2500	2518
1282	1300	2607	2625
1307	1325	2650	2668
1320	1338	2800	2818
1332	1350	3000	3018
1357	1375	3150	3168
1382	1400	3350	3368
1400	1418	3550	3568
1407	1425	3750	3768
1432	1450	4000	4018
1457	1475	4250	4268
1482	1500	4500	4518
1500	1518	4862	4880
1507	1525	5080	5098
1532	1550		
1557	1575		
1582	1600		

* 其他尺寸亦可供應。 Other sizes also available.

**SWR****SP-SERIES METRIC V-BELTS****High Capacity Narrow Wrapped V-Belt / SPZ, SPA, SPB, SPC****European Standard Sizes / DIN 7753 Part 1**

規格標示 SIZE MARK

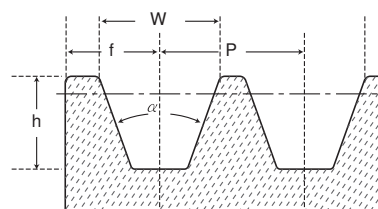
example: SPB 1250



SPB			
有效周長 Pitch Length mm	外 周 長 Outside Length mm	有效周長 Pitch Length mm	外 周 長 Outside Length mm
1250	1272	4250	4272
1320	1342	4500	4522
1400	1422	4750	4772
1500	1522	5000	5022
1600	1622	5600	5622
1700	1722	6000	6022
1800	1822	6300	6322
1900	1922	6700	6722
2000	2022	7100	7122
2120	2142	7500	7522
2240	2262	8000	8022
2360	2382	8500	8522
2500	2522	9000	9022
2650	2672	10000	10022
2800	2822	10600	10622
3000	3022	11200	11222
3150	3172	11250	11252
3550	3572		
3750	3772		
4000	4022		

SPC			
有效周長 Pitch Length mm	外 周 長 Outside Length mm	有效周長 Pitch Length mm	外 周 長 Outside Length mm
2000	2030	6300	6330
2120	2150	6700	6730
2240	2270	7100	7130
2360	2390	7500	7530
2500	2530	8000	8030
2650	2680	8500	8530
2800	2830	9000	9030
3000	3030	8500	9530
3150	3180	10000	10030
3350	3380	10600	10630
3550	3580	11200	11230
3750	3780	11800	11830
4000	4030	12500	12530
4250	4280	15000	15030
4500	4530		
4750	4780		
5000	5030		
5300	5330		
5600	5630		
6300	6330		

* 其他尺寸亦可供應。 Other sizes also available.



滑輪規格/德國工業標準

Pulley for SP-series Metric V-Belt

German Industrial Standard -DIN 2211-

型 別 Belt Type	外 徑 Outside Dia (mm)	輪槽角度 Groove Angle α	輪槽寬度 Groove Width w (mm)	輪槽深度 Groove Depth h (mm)	輪槽間距 Groove Pitch P (mm)	f mm
SPZ	65~82	34°	9.7	11	12	8
	83~up	38°				
SPA	92~120	34°	12.7	14	15	10
	121~ up	38°				
SPB	142~192	34°	16.3	18	19	12.5
	193~ up	38°				
SPC	226~317	34°	22	24	25	17
	318~ up	38°				

適用最小輪徑 Min. Pulley Diameter


SPZ	SPA	SPB	SPC
70mm	95mm	175mm	280mm

外銷最少訂量 Min. Quantity for Export-pcs

SPZ	SPA	SPB	SPC
150	150	100	60

**SWR****RAW EDGE WEDGE V-BELTS/V, VX, SP, XP**

切邊型高馬力用三角帶 / V, VX, SP, XP

標準規格 *Standard Size: RMA / MPTA, DIN7753 Part 1***CROSS SECTION**

Dimensions	3V,3VX	5V,5VX	SPZ,XPZ	SPA,XPA	SPB,XPB	SPC,XPC
a (mm)	9.5	15.9	10.0	13.0	16.0	22.0
b (mm)	8.0	13.0	8.0	10.0	13.0	18.0
θ (°)	40	40	40	40	40	40

規格標示 SIZE MARK

example: 3VX - 220

3V.....型 式 Belt type
X.....齒 型 Cogged Type
220.....外周長 Outside Length in
1/10"(22")

example: SPZ - 630

SPZ.....型 式 Belt Type
630.....有效周長 Pitch Length
(630mm)

承製範圍 Belt Range

切邊式 Raw Edge Type	切邊齒型式 Raw Edge Cogged	皮帶長度 Belt Length Range	最小訂量 Min Quantity(pcs)
3V	3VX	22"→100"	70
5V	5VX	24"→100"	50
SPZ	XPZ	557mm→2540mm	70
SPA	XPA	572mm→2540mm	50
SPB	XPB	610mm→2540mm	40
SPC	XPC	650mm→2540mm	35

特 點 Feature

* 強力化纖索與橡膠材質緊密結合，適合高馬力傳動。

Very good adhesion between high-tension polyester cable cords and rubber layers that are suitable for a high power transmission.

* 具耐油耐熱特性，適合嚴苛條件使用。

With properties of oil & heat-resistance, it is suitable to be used under severe application.

* 耐側壓性及耐伸長性強，傳動效率高。

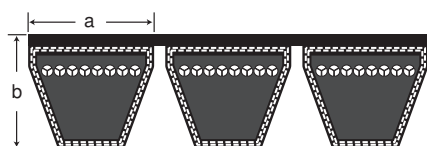
Strong withstanding to the compression to belt's both sides, good performance in stretching and efficiency transmission.

* 齒型帶之屈曲性能尤其卓越，可用於較小帶輪。

Outstanding feature of flexibility which allow cog belt to be run in the pulley with a smaller diameter.

**SWR****BANDED V-BELTS**


重馬力用聯體帶

包布型 *Wrapped Type***CROSS SECTION****Type: A, B, C, D, E****3V, 5V, 8V****SPZ, SPA, SPB, SPC****承製範圍 Belt Range**

包布型聯體 Banded V/Belt	截面尺寸 Dimension a/b(mm)	皮帶間距 (e) Belt Pitch(mm)	長度範圍/每模條數 Belt Range/Rib No. (pcs)	
A	13/12	15.88	33"~ 90" / 26	91"~170" / 32
B	17/14	19.05	33"~ 90" / 22	91"~450" / 26
C	22/16.8	25.4	40"~ 90" / 16	91"~560" / 20
D	32/21.8	36.53	93"~270" / 14	271"~560" / 20
E	40/27.2	44.5		160"~450" / 12
3V	9.0/10.5	10.3	33"~ 90" / 40	91"~160" / 50
5V	15.0/15.5	17.5	33"~ 90" / 24	91"~450" / 30
8V	25/25.5	28.6	93"~250" / 20	251"~560" / 24
SPZ	9.7/11.4	12.0	838mm~2286mm / 34	2310mm~ 4064mm/42
SPA	12.7/13.4	15.0	838mm~2286mm / 28	2310mm~ 4318mm/34
SPB	16.3/16.0	19.0	838mm~2286mm / 22	2310mm~11430mm/26
SPC	22/20.8	25.5		2310mm~11430mm/20

三五牌各種聯體帶從2條聯、3條聯至6條聯以上皆可承製。超過7條聯時，可選2組4條聯並用。選購時，請確認相鄰皮帶之間距(e)要與帶輪之輪溝吻合，以確保傳動效率與長期使用。

SANWU Banded V-belts are available from 2ribs, 3 ribs up to 7ribs. For application more than 7 ribs, two matched sets of 4-rib shall be used. To keep a good transmission efficiency and longlife of running, be sure the pitch between every next two belts shall match to the pulleys' firmly.



皮帶與滑輪 Belt & Pulley


**汽車用三角帶 / SWF, SRL, SRC / JASOE107, ISO2790**

適用驅動汽車發動的補助設備，如風扇、發電機、水泵、壓縮機等。


Suitable for driving automotive generator auxiliary equipment such as fan, generator, pump, compressor.

種類 Classifications


包布帶 Wrapped Belt
(SWF)



切邊帶 Raw edge belt
平底式 Laminated
(SRL)



切邊帶 Raw edge belt
齒型式 Cogged
(SRC)



No	名 稱	Name	No	名 稱	Name
1	外 包 布	Wrapping fabric	5	心 線	Tensile members
2	上 層 布	Top fabric	6	下層橡膠	Compression rubber
3	上層橡膠	Top cushion rubber	7	底 布	Bottom fabric
4	接著橡膠	Adhesion rubber	8	層 布	Laminate fabric

特 點 Feature

SWF... 皮帶表面由帆布包覆，異音的發生少，從帆布的劣化狀態可判斷使用壽命。

Outside covered with fabric to reduce noise, belt life can be calculated from the wear off of the fabric.

SRL... 下層橡膠的數層帆布能有效抑制異音的發生，效果接近包布帶。

Covered with multiple fabrics in the bottom to reduce noise, similar result to wrapped belt.


SRC... 屈曲性好，傳動效率佳，可使用於更小的帶輪。構造上，耐熱性極佳。

Better flexibility, better transmission efficiency, smaller pulleys can be used. Very good performance to heat resistance.

特 性	Feature	SWF	SRL	SRC
耐側壓性	Resistant to side pressure	○	☆	☆
耐 熱 性	Resistant to heat	○	○	☆
耐屈曲性	Resistant to flexibility	○	○	☆
耐粉塵性	Resistant to dust	○	☆	☆
伸 長 性	Elongation	○	☆	☆
異 音	Noise	☆	☆	○

○：優 Good

☆：特優 Excellent

**CROSS SECTION**

Dimensions		HM (1)	BC (3)	CD (4)	A (6)	B (8)	C (9)
SWF	a(mm)	10.0	-	-	12.5	16.5	22.0
	b(mm)	8.0	-	-	9.0	11.0	14.0
	θ (°)	38	-	-	40	40	40
SRL	a(mm)	10.5	18.8	-	12.7	17.0	-
	b(mm)	7.5	9.5	-	8.0	9.5	-
	θ (°)	38	38	-	38	38	-
SRC	a(mm)	10.5	18.8	25.4	12.7	17.0	22.5
	b(mm)	8.0	11.0	13.0	9.0	11.0	13.0
	θ (°)	38	38	38	38	38	38

規格標示 SIZE MARK

example:SRL-6340

- * S....三五牌 SAN WU
- * R....切邊式 RAW EDEG
- * L....皮帶結構代號 Belt Section
 - L:平底式 Laminated
 - C:齒型式 Cogged
- * 6....皮帶型別代號 Belt No
- * 340...有效周長 Pitch Length in 1/10" (34")

example:SWF-1375

- * SWF....三五包布式汽車帶
 - SAN WU Automotive Wrapped Belt
- * 1.....HM 型代號 Belt No of HM Type
- * 375.....皮帶長度 Belt Length (375/10")
 - HM Type:外周長 Outside Length
 - A,B,C Type:有效周長 Pitch Length

承製範圍 Belt Range

Belt Types	HM	BC	CD	A	B	C
Belt Length	22"~100"	26"~100"	31"~100"	22"~100"	24"~100"	31"~100"
Min Quantity	70pcs	35pcs	25pcs	55pcs	40pcs	30pcs

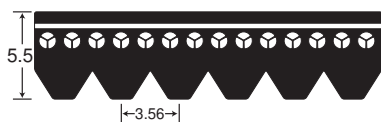
* Pitch Length (inch) x 25.4 + k (mm)=Outside Length

換算之尾數四捨五入，只取0及5mm。 例:21.0x25.4=533.4 ÷ 535 mm

K值： A...18 B...22 C...25

適用最小輪徑 Min. Pulley Diameter-mm

Type	HM	BC	CD	A	B	C
SWF	70	-	-	75-	125	200
SRL	65	-	-	70	90	-
SRC	60	85	110	65	80	100

**汽車用多槽皮帶 / PK****V-Ribbed Belts For Automotive Industry / RMA****CROSS SECTION****規格標示 SIZE MARK**

example: 4PK600

4.....山數 Number of ribs

Pk.....皮帶形式 Belt type

600.....有效周長 Pitch length(600mm)

標準尺寸 Standard Sizes/RMA

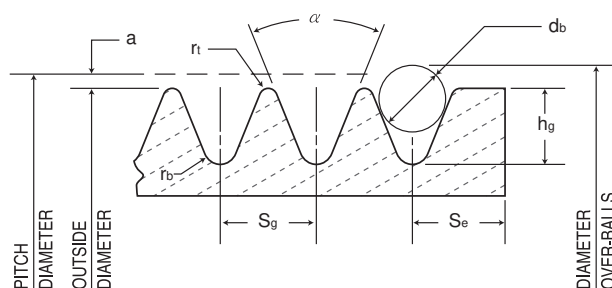
皮帶編號 Belt No						
PK550	PK730	PK850	PK975	PK1120	PK1280	PK1550
PK600	PK750	PK875	PK1000	PK1150	PK1320	PK1600
PK630	PK775	PK900	PK1030	PK1180	PK1360	PK1650
PK650	PK800	PK925	PK1060	PK1220	PK1400	PK1700
PK690	PK825	PK950	PK1090	PK1250	PK1500	PK1780

特 點

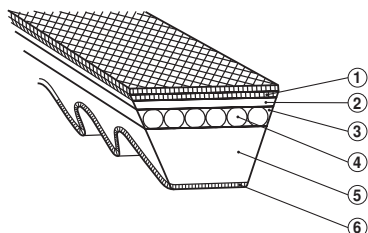
三五多槽式傳動帶係針對螺旋形的驅動系統精確設計，能在嚴苛的操作條件下表現順意的傳動能量。

Feature

SAN WU V-RIBBED AUTOMOTIVE BELT specially designed for spiral drive system can operate with best transmission efficiency even under severe condition.

帶輪斷面 Standard Groove Dimension**標準帶輪尺寸 Standard Groove Dimension-inch**


最小外徑 Minimurn Recommended Outside Diameter	輪槽角度 α Groove Angle ± 0.25 Degrees	S_g^*	r_t	$2a$	r_b	h_g Minimum	d_b	S_e
1.50	40	0.141 ± 0.002	0.010 +0.005 -0.000	0.038	0.020 +0.000 -0.005	0.122	0.1093 ± 0.0005	0.125 +0.050 -0.000

**SWR****VARIABLE SPEED V / BELTS FOR MOTORCYCLE****機車用變速帶 / SRCV**

說明	1上層布	Top fabric
	2上層橡膠	Top cushion rubber
	3接著橡膠	Adhesion rubber
	4強力心線	Tensile members
	5下層橡膠	Bottom rubber
	6底布	Bottom fabric

特 點：三五機車帶採強固結構設計，具備耐側壓性、低伸長性、運轉順暢等特點，在大衝擊和高熱環境下，能充分追隨速度的變化，發揮傳動效率。

Feature:San Wu's variable speed V-belt for motorcycles are available in a strong construction, with the features of good lateral stiffness, low stretch & smooth running the belts run efficiently along with the change of drive speed even under critical conditions like big shocks' and high temperature'.

機車帶規格 Bike Belt Sizes**CROSS SECTION**

車 種 Models	上 寬 Top Width a (mm)	厚 度 Thickness b (mm)	外周長 Outside Length mm	角 度 Angle (°)
新 生 代	14.0	8.0	664	30
奪 標	15.5	8.0	642	30
旋 風90	17.0	8.0	880	30
風 速125	17.0	9.5	817	30
名 流150	19.0	9.5	818	30
幻 象29	16.8	8.0	666	30
風 神50	18.0	8.5	667	30
大路易90	18.0	8.5	730	30
凌 風90	16.5	8.5	802	30
豪 邁125	19.5	10.0	760	30
翔 鷹100	17.0	9.5	720	30
迎 光150	22.0	10.0	813	30
迅 光125	22.0	10.0	782	30

* 其他尺寸亦可供應。 Other sizes also available. Min. Quantity for Export:100 pcs

規格標示例 SIZE MARK

example:SRCV 14-664

SRCV....機車帶 Motorcycle Belt

14.....上 寬 Top Width (mm)

664.....外周長 Outside Length (mm)

注意事項


- * 安裝時兩皮帶輪必須直線對正。
- * 皮帶保持清潔，安裝時若沾染油漬要擦乾淨。
- * 皮帶兩邊磨耗心體線鬚露出時應切掉，避免線鬚捲入輪軸。
- * 皮帶寬度磨耗達1mm以上時應換新帶。

Attention

- 1.Prior to the installation, check whether the pulleys are exactly aligned and the shafts are parallel.
- 2.Belts shall be clean and free from direct contact with oils, lubricants, chemicals, etc.
- 3.Preventing any cord ends drawn into the shaft of pulley, cut them off once emerged from belt's both sides.
- 4.Replace a new belt if it worn off more than 1 mm in width.

**SWR****VARIABLE SPEED COGGED BELTS/VS**

高性能變速帶 / VS

美國標準規格 *American Standard Sizes / RMA***CROSS SECTION**

規格標示 SIZE MARK

example: 1422V235

14.....輪槽的上寬 Top width of groove in closed position
in 1/16"(14/16")

22.....輪 槽 角 度 Groove angle

V變 速 Variable speed

235...有效周長 Belt pitch length in 1/10"(23.5")

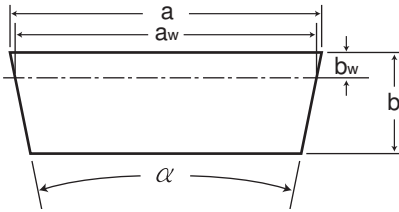
規格一覽表 Belt Sizes

7.522V240	1626V517	1922V526	2322V601	2636V332	3028V386	3432V528	4630V663
1022V220	1626V661	1922V544	2322V604	2826V412	3030V387	3630V455	4630V683
1022V247	1628V210	1922V604	2322V621	2826V452	3226V392	3636V479	4632V659
1422V235	1628V315	1926V250	2322V661	2830V337	3226V395	3826V465	4632V680
1422V240	1632V210	1926V275	2322V667	2830V363	3226V400	3830V501	4830V602
1422V270	1632V220	1926V333	2322V681	2830V366	3226V433	3830V515	4830V653
1422V290	1632V250	1926V407	2326V359	2830V393	3226V434	3830V517	4830V663
1422V300	1822V290	1930V355	2330V2732	2830V396	3226V439	3830V580	4830V683
1422V330	1822V320	1930V400	330V338	2830V422	3226V450	3830V587	4830V692
1422V340	1822V328	1930V475	2330V359	2830V428	3226V465	3836V418	4836V558
1422V360	1822V551	1930V500	2330V537	2830V567	3226V505	3836V426	4836V608
1422V400	1822V590	1930V560	2332V373	2830V666	3226V514	3836V654	4836V618
1422V420	1822V629	1930V604	2430V290	2836V343	3226V545	4036V514	4836V642
1422V440	1826V250	1930V641	2430V319	2836V350	3226V585	4036V574	4836V655
1422V460	1828V368	2230V266	2430V345	2836V361	3226V603	4230V556	4836V659
1422V470	1832V338	2230V270	2430V445	2836V380	3226V650	4230V605	4836V670
1422V480	1922V250	2230V273	2436V331	2926V366	3226V663	4430V510	
1422V520	1922V256	2230V275	2526V302	2926V400	3230V419	4430V530	
1422V540	1922V277	2230V326	2526V314	2926V426	3230V528	4430V555	
1422V600	1922V282	2230V375	2530V309	2926V471	3230V553	4430V570	
1422V660	1922V292	2322V329	2530V470	2926V477	3230V560	4430V578	
1426V298	1922V298	2322V347	2530V490	2926V486	3230V585	4430V600	
1430V215	1922V321	2322V364	2530V530	2926V521	3230V613	4430V610	
1522V270	1922V332	2322V372	2530V550	2926V546	3230V670	4430V630	
1622V218	1922V363	2322V373	2530V575	2926V574	3236V342	4430V660	
1626V262	1922V381	2322V384	2530V595	2926V586	3236V369	4430V670	
1626V304	1922V386	2322V396	2530V610	2926V606	3236V389	4430V690	
1626V330	1922V403	2322V421	2530V618	2926V613	3236V552	4436V329	
1626V339	1922V408	2322V434	2530V630	2926V616	3236V643	4436V525	
1626V380	1922V417	2322V441	2530V660	2926V636	3326V474	4436V551	
1626V395	1922V426	2322V461	2530V670	2926V646	3430V450	4436V561	
1626V411	1922V443	2322V481	2530V690	2926V666	3430V510	4436V576	
1626V440	1922V454	2322V486	2626V369	2926V686	3432V450	4436V646	
1626V455	1922V460	2322V521	2626V388	2930V348	3432V456	4626V596	
1626V513	1922V484	2322V541	2630V345	2930V492	3432V484	4630V650	

* 其他尺寸亦可供應。 Other sizes also available.

外銷最少訂量 Min Quantity for Export

皮帶上寬 Belt Top Width	inch	7.5/16	10/16	14/16→ 16/16	18/16→ 19/16	22/16→ 26/16	28/16→ 32/16	34/16→ 40/16	42/16→ 48/16
Min. Quantity	pcs	60	45	30	25	20	15	12	10

**SWR****VARIABLE SPEED COGGED BELTS / VS****High Capacity Variable Speed Belt / VS****國際標準規格 / ISO Standard Sizes****CROSS SECTION**

型別 Belt Type	上寬 Top Width a (mm)	厚度 Thickness b (mm)	角度 Angle α°
W16	17	6	26°
W20	21	7	28°
W25	26	8	28°
W31.5	33	10	28°
W40	42	13	28°
W50	52	16	30°
W63	65	20	30°

型別 Belt Type	有效周長 Lw (mm)	內周長 Li (mm)	型別 Belt Type	有效周長 Lw (mm)	內周長 Li (mm)
W16	450	422	W40	1120	1058
	500	472		1250	1188
	560	532		1400	1338
	630	602		1600	1538
	800	772		1800	1738
W20	560	527		2000	1938
	630	597		2240	2178
	710	677		2500	2438
	800	767	W50	1400	1325
	900	867		1600	1525
W25	710	672		1800	1725
	800	762		2000	1925
	900	862		2240	2165
	1000	962		2500	2425
	1120	1082		2800	2725
	1250	1212	W63	1800	1706
	1400	1362		2000	1906
	1600	1562		2240	2146
W31.5	900	853		2500	2406
	1000	953		2800	2706
	1120	1073		3150	3056
	1250	1203		3550	3456
	1400	1353			
	1600	1553			
	1800	1753			

Lw=Belt pitch length

Li=Belt inside length

皮帶長度 Belt length

In determining the length of the belt,
the following geometric relation applies:

$$bw = 0.25 b$$

From which the following can be derived:

$$\Delta L = 4.71b$$

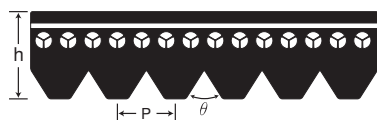
$$Lw = Li + \Delta L$$

$$Li = Lw - \Delta L$$

$$La = Li + (2\pi b) \dots \text{Outside length}$$

承製範圍 Belt Range

Top Width	10	to	100 mm
Thickness	5	to	26 mm
Length Lw	535	to	1800 mm

**SWR****V-RIBBED BELTS/H, J, L, M****多槽皮帶 / J, L, M / RMA****CROSS SECTION**

Dimensions	H	J	L	M
Rib Pitch P(mm)	1.6	2.35	4.7	9.4
Angle θ	40°	40°	40°	40°
Thickness h(mm)	3	4	10	17

標準尺寸 Standard Sizes/RMA

H		J		L		M	
皮帶編號 Belt No	有效周長 Pitch Length (mm)	皮帶編號 Belt No	有效周長 Pitch Length (mm)	皮帶編號 Belt No	有效周長 Pitch Length (mm)	皮帶編號 Belt No	有效周長 Pitch Length (mm)
425H	1080	270J	666	400L	1016	755M	1918
430H	1092	280J	711	405L	1029	850M	2159
460H	1168	290J	737	410L	1041	900M	2286
470H	1194	300J	762	415L	1054	940M	2388
472H	1200	310J	787	420L	1067	990M	2515
484H	1230	315J	800	425L	1080	1060M	2692
490H	1244	320J	813	430L	1092	1115M	2832
497H	1262	330J	838	450L	1143	1150M	2921
500H	1270	340J	864	460L	1168	1185M	3010
506H	1285	345J	876	480L	1219	1230M	3124
508H	1290	350J	889	500L	1270	1310M	3327
515H	1309	360J	914	540L	1372	1470M	3734
520H	1321	370J	940	560L	1422	1610M	4089
525H	1333	375J	953	565L	1435	1650M	4191
540H	1371	380J	965	570L	1448	1760M	4470
550H	1397	390J	991	600L	1524		
567H	1439	400J	1016	615L	1562		
630H	1600	410J	1041	635L	1613		
730H	1854	420J	1067	650L	1651		
746H	1895	430J	1092	655L	1664		
754H	1915	440J	1118	675L	1715		
760H	1930	450J	1143	680L	1727		
770H	1956	460J	1168	690L	1753		
784H	1992	480J	1219				
800H	2030	490J	1245				
820H	2083	510J	1295				
848H	2155	530J	1346				
946H	2404	550J	1397				
		580J	1473				
		610J	1579				
		650J	1651				

* 其他尺寸亦可供應。 Other sizes also available.



規格標示 SIZE MARK

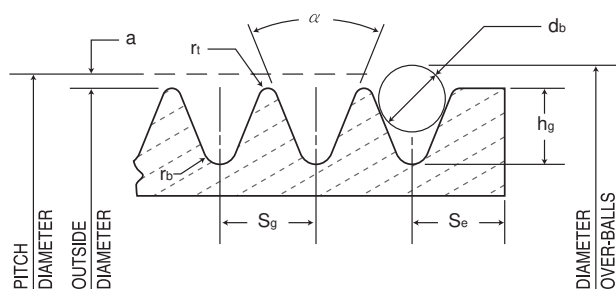
example: 220 J 5

220...有效周長 Belt pitch length in 1/10" (22")

J.....皮帶型式 Belt type

5.....山數 Number of ribs




帶輪斷面 Standard Groove Dimension



標準帶輪尺寸 Standard Groove Dimension-inch

型 式 Cross Section	最小外徑 Minimum Recommended Outside Diameter	輪槽角度 α Groove Angle ± 0.25 Degrees	S_g	r_t +0.005 -0.000	$2a$	r_b	h_g Minimum	d_b ± 0.0005	S_e
H	0.50	40	0.063 ± 0.001	0.005	0.020	0.013 +0.000 -0.005	0.041	0.0469	0.080 +0.020 -0.010
J	0.80	40	0.092 ± 0.001	0.008	0.030	0.015 +0.000 -0.005	0.071	0.0625	0.125 +0.050 -0.015
L	3.00	40	0.185 ± 0.002	0.015	0.058	0.015 +0.000 -0.005	0.183	0.1406	0.375 +0.050 -0.030
M	7.00	40	0.370 ± 0.003	0.030	0.116	0.030 +0.000 -0.005	0.377	0.2812	0.5 +0.100 -0.040

**SWR****DOUBLE V-BELTS / AA, BB, CC****六角帶 / AA, BB, CC****皮帶斷面與規格 Cross Section and Sizes-inch**

Cross Sections	Belt No	Outside Length	Belt No	Outside Length	Belt No	Outside Length
 AA	AA68	69.2	AA92	93.2	AA128	129.2
	AA70	71.2	AA95	96.2	AA135	136.2
	AA72	73.2	AA98	99.2	AA140	141.2
	AA75	76.2	AA100	101.2	AA150	151.2
	AA78	79.2	AA105	106.2	AA160	161.2
	AA80	81.2	AA110	111.2	AA190	191.2
	AA85	86.2	AA115	116.2	AA220	221.2
	AA90	91.2	AA120	121.2	AA250	251.2
 BB	BB41	42.6	BB103	104.6	BB180	181.6
	BB43	44.6	BB105	106.6	BB182	183.6
	BB45	46.6	BB107	108.6	BB190	191.6
	BB55	56.6	BB112	113.6	BB195	196.6
	BB60	66.6	BB116	117.6	BB210	211.6
	BB68	69.6	BB120	121.6	BB225	226.6
	BB73	74.6	BB123	124.6	BB228	229.6
	BB75	76.6	BB128	129.6	BB230	231.6
	BB77	78.6	BB130	131.6	BB240	241.6
	BB81	82.6	BB136	137.6	BB250	251.6
	BB85	86.6	BB144	145.6	BB260	261.6
	BB90	91.6	BB155	156.6	BB270	271.6
	BB93	94.6	BB158	159.6	BB300	301.6
	BB97	98.6	BB173	174.6	BB320	321.6
 CC	CC61	63.1	CC136	138.1	CC240	242.1
	CC65	67.1	CC140	142.1	CC270	272.1
	CC78	80.1	CC144	146.1	CC300	302.1
	CC85	87.1	CC158	160.1	CC330	332.1
	CC90	92.1	CC162	164.1	CC360	362.1
	CC96	98.1	CC173	175.1	CC390	392.1
	CC105	107.1	CC180	182.1	CC420	422.1
	CC112	114.1	CC195	197.1	CC450	452.1
	CC120	122.1	CC210	212.1	CC480	482.1
	CC128	130.1	CC225	227.1	CC500	502.1

* 其他尺寸亦可供應。 Other sizes also available.

* 外銷最少訂量。 Min Quantity for Export(pcs):AA...100,BB...100,CC...60.

三五牌六角帶具多重驅動性，皮帶兩面皆可驅動一般使用一具相反方向驅動軸的設備上。六角橡膠帶可使用於碾米機、軋棉機、碎石機、聯合收割機和其他機械。

SAN WU Double V-Belts are essentially MULTITYPE STANDARD Belts. Either side of the belt can be used as a driving surface. They are used on equipment where a number of shafts have to be driven in opposite directions, at the same time, by a single belt. DOUBLE V-Belts are found popularity on cotton gins, rock crushers, Grain combines, and other machineries.

* 本型錄的數據資料僅供參考，不具保證責任。

All the information contained in this catalogue is based on reasonable research, but does not guarantee any result.



保管與使用

- 1.皮帶應避免置於陽光直射之處所。
- 2.皮帶最好吊掛於牆上，或於桌架上適當放置；切勿堆放地面積壓放置，以防久置扭曲變形。
- 3.盡量使用大直徑皮帶輪，以減輕運轉中的皮帶發熱。
- 4.安裝皮帶時，須注意兩軸平行，輪溝同一直線，皮帶與軸呈直角狀態。
- 5.皮帶輪之輪溝全套要同寬同深，以使全套皮帶鬆緊同一，平均受力。
- 6.輪溝表面必須光滑無疵，無久用磨損凹下現象，且其角度應合於標準規格，否則皮帶極易磨損而縮短壽命。
- 7.盡可能避用惰輪(中間輪)，非用不可時，應置於皮帶鬆弛跨段之內側為宜。
- 8.輪溝之軸承及軸承座應定期注油保養，以確保平順運轉。
- 9.皮帶安裝時，應調節皮帶輪距離，切勿使用工具強行掛入，以免損害皮帶。掛好的皮帶鬆緊度要適宜，過鬆或太緊皆會影響皮帶的壽命。
- 10.皮帶初用時伸長所形成的鬆弛現象，及皮帶與皮帶輪間的磨耗，應按規定予與調整收緊。最好每天開動以前先檢視一下。
- 11.皮帶使用條數以較計算值略多為宜，因安全率提高而延長使用壽命，結果反而較經濟。
- 12.皮帶更換應全套同時換新。新舊或不同廠牌混用時，因伸長性不一致，會減少皮帶的耐久力。
- 13.皮帶禁用皮帶臘或其他潤滑劑，並應保持清潔，防止油污、粉塵或化學藥品附著。
- 14.皮帶及皮帶輪應加護罩或護柵以策安全。加護罩時應考慮通風問題，以免密閉不易散熱，影響膠帶壽命。

1. Do not expose belts to direct sunlight during storage.
2. Store belts in shelves or hang belts on racks. Placing belts on floor or ground. Avoid piling belts up. Avoid storing belts in heavily bent condition.
3. Use bigger pulley to reduce heat during operation.
4. Check sheave alignment. Misalignment of sheave will shorten the belt life.
5. Make sure all sheave grooves are equal in dimensions.
6. Check sheaves for groove wear. If more than 1/32 inch of "Dished Out" can be seen, short belt life may be expected.
7. Avoid using idler (middle pulley). If unavoidable put on the inside of the slack side.
8. Check bearings for oil.
9. Slack off on take-up until belts can be placed in grooves without forcing. Never pry the belts in to the sheave grooves to prevent cords break.
10. Tension drive properly. Give belts a few days running time to become seated in sheave grooves, then readjust take-up if necessary.
11. Use more belts than calculated number to increase safety factor and belt life and in the end more economical.
12. Always use a set of new belts from one manufacture a set of belt. Mixing new and used belts in a set will shorten the belt life due to unequal stretch of belts.
13. Never use belt dressing. Be careful not to expose belts, to oil, dust or chemicals.
14. Make sure V-belt drives are covered for safety before turning the machine on. Air tight cover shortens the belt life because it prevents heat radiation. Maintain proper ventilation.

**SWR**

註冊商標與其他製品

值得信賴的商標用在值得信賴的製品，我們的主要註冊商標如下：

三五  **SANWU**

THREE FIVE

三駱






THREE CAMELS

金字塔

PYRAMID



三環

五角帶 V-belt in diamond shape for conveying		<table><tr><td></td><td>A</td><td>B</td><td>C</td></tr><tr><td>a : mm</td><td>12.5</td><td>16.5</td><td>22</td></tr><tr><td>b : mm</td><td>10</td><td>11</td><td>14</td></tr><tr><td>t : mm</td><td>9</td><td>15</td><td>14</td></tr><tr><td>θ</td><td>64°</td><td>58°</td><td>76°</td></tr><tr><td>L : inch</td><td colspan="3">Length 78→450</td></tr></table>		A	B	C	a : mm	12.5	16.5	22	b : mm	10	11	14	t : mm	9	15	14	θ	64°	58°	76°	L : inch	Length 78→450																							
	A	B	C																																												
a : mm	12.5	16.5	22																																												
b : mm	10	11	14																																												
t : mm	9	15	14																																												
θ	64°	58°	76°																																												
L : inch	Length 78→450																																														
花紋皮帶 With Rough Top Surface		各種包布型皮帶皆可製造。 Any wrapped V-Belts are available.																																													
白身三角帶 White V-Belt		採用超強化纖索與無膠糊之白色外包布，特別適合對設備清潔度要求嚴苛的使用條件。各種包布型皮帶A, B, 3V, 5V, SP系列等皆可製造。 With high tension Polyester Cable cords as enforcing members and special bareback fabric as V-Belt jacket, this special kind of V-Belt is perfect for the application that require critical clean environment. Any wrapped V-Belts(A,B,3V,5V,SP Series etc)are available.																																													
圓型帶 Round Belt		<table><tr><td>Diameter</td><td>5/16"</td><td>3/8"</td><td>7/16"</td><td>1/2"</td></tr><tr><td>Length</td><td>36→130"</td><td>36→130"</td><td>36→130"</td><td>36→130"</td></tr></table>	Diameter	5/16"	3/8"	7/16"	1/2"	Length	36→130"	36→130"	36→130"	36→130"																																			
Diameter	5/16"	3/8"	7/16"	1/2"																																											
Length	36→130"	36→130"	36→130"	36→130"																																											
外齒型帶 V-Belt with teeth pattern surface		a:16.5mm b:11.0mm L:80"→500" 此外，不同用途之各種模樣亦可供應或特別設計。 Different, patterns for other application will also be available or designed to meet customer's requests.																																													
熱可塑橡膠帶 Volta Belt		<table><tr><td></td><td>3VX</td><td>5VX</td><td>8VX</td><td></td></tr><tr><td>a/b mm</td><td>9.5/8</td><td>16.3/13</td><td>25.2/23</td><td></td></tr><tr><td>L : inch</td><td>30→317</td><td>30→322</td><td>46→332</td><td></td></tr><tr><td></td><td>XPZ</td><td>XPA</td><td>XPB</td><td>XPC</td></tr><tr><td>a/b mm</td><td>9.5/8</td><td>12.7/10</td><td>16.3/13</td><td>22/18</td></tr><tr><td>L : mm</td><td>750→8040</td><td>750→8060</td><td>750→8174</td><td>1121→8400</td></tr><tr><td></td><td>AX</td><td>BX</td><td>CX</td><td>DX</td></tr><tr><td>a/b mm</td><td>13/8</td><td>17/11</td><td>22/14</td><td>32/20</td></tr><tr><td>L : inch</td><td>30→315</td><td>30→320</td><td>44→328</td><td>44/329</td></tr></table>		3VX	5VX	8VX		a/b mm	9.5/8	16.3/13	25.2/23		L : inch	30→317	30→322	46→332			XPZ	XPA	XPB	XPC	a/b mm	9.5/8	12.7/10	16.3/13	22/18	L : mm	750→8040	750→8060	750→8174	1121→8400		AX	BX	CX	DX	a/b mm	13/8	17/11	22/14	32/20	L : inch	30→315	30→320	44→328	44/329
	3VX	5VX	8VX																																												
a/b mm	9.5/8	16.3/13	25.2/23																																												
L : inch	30→317	30→322	46→332																																												
	XPZ	XPA	XPB	XPC																																											
a/b mm	9.5/8	12.7/10	16.3/13	22/18																																											
L : mm	750→8040	750→8060	750→8174	1121→8400																																											
	AX	BX	CX	DX																																											
a/b mm	13/8	17/11	22/14	32/20																																											
L : inch	30→315	30→320	44→328	44/329																																											





**SWR****TRADE MARKS & OTHER PRODUCTS**

Reliable trade marks for San Wu's reliable products. Our main registered Trade marks are:














三埃斯


SSS

555**SWR****超 儕**
TRANSMATE**超 儕**
TRANSMATCH

磨玻璃機 強力環帶 Endless Belt for Glass Grinding Machine		花 紋		平 面			
		Roughtop Type		Flat Type			
		a : mm	220	225	240	260	
		b : mm	12,15	12,15	12	12	
L : inch	Length 300→500						
耐磨強力環帶 Superior Abrasion Endless Belt		a : inch	1, 1 1/4 1 1/2, 2	2 1/2, 3,4	5, 6, 7	8, 9, 10	
		b : mm	3	4	5	6	
		L : inch	60 ↑	90 ↑	90 ↑	90 ↑	
		弧形強力環帶 Endless Belt in Arc-Shape		a : inch	1	1	1 1/4
b : mm	12,15						
L : inch	120 → 500			35 → 80			120 → 500
a : inch	1 5/8			2	2 1/4	2 1/2	
b : mm	8	5, 7, 9	7	5			
L : inch	120 → 500						
平面帶 Transmission Belt	圓邊型 Round Edge Type  切邊型 Cut Edge Type 	標誌 MARK	抗拉強度 Tensile Strength	CNS標準 CNS Standard	皮帶寬度 Belt Width		
		三五牌	60 ↑ kgf/cm ply	第一種 55 ↑	1 inch ↑		
		三環牌	55 ↑ kgf/cm ply	第二種 50 ↑	1 inch ↑		
		★配合顧客需要，可使用各種特織帆布（如白身帶面帆布，緯紗尼龍棉帆布……等）及特殊膠料（如耐熱、耐油、耐化學品……等）配合，製成各種特殊用途之傳動膠帶。 Changes in design is available for your special needs.					
強力粗布環帶 Endless Belt with Bare Duck		a : inch	4, 5, 6, 8, 10				
		b : mm	3 → 10				
		L : inch	60 → 500				
		同步齒型帶 Timing Belt		特別進口銷售			
RPP3, RPP5, RPP8, RPP14,							
H, HL, L, XH, XL							
3M, 5M, 8M, 14M,							

輸送帶主要產品 *San Wu's Conveyor belts:*

化纖、帆布輸送帶 Fabric Conveyor Belt 	鋼索帆布輸送帶 STF Conveyor Belt 	鋼索輸送帶 ST Conveyor Belt 	Aramid輸送帶 Aramid Conveyor Belt 	管狀輸送帶 Pip Conveyor Belt 
裙邊輸送帶 Corrugated 	飼煤機輸送帶 Flanges Notching 	輥筒帶 Blast Cleaning Tumbling Belt 	人字型輸送帶 Chevrons 	一字型輸送帶 Chevrons 
M字型輸送帶 Vee Ridge 	小V型輸送帶 Cleat-Top 	Y字型輸送帶 Y-Pattern 	花紋輸送帶 Roughtop 	提運帶 Bucket Belt 



SWR

三五橡膠廠股份有限公司 SAN WU RUBBER MFG. CO., LTD.

總 公 司
及 工 廠

彰化縣和美鎮彰美路二段106號 電話：(04)7355142~6 傳真：(04)7353802
 台北辦事處／台北市太原路107號3F 電話：(02)25559820 傳真：(02)25567847
 台北門市部／台北市太原路107號 電話：(02)25552325~6 傳真：(02)25567847
 桃園加工廠／桃園市鹽庫街10號 電話：(03)3262070~2 傳真：(03)3258432
 台南營業所／台南市公園路327-1號 電話：(06)2279955~6 傳真：(06)2209610
 高雄加工廠／鳳山市輜汽路9號 電話：(07)7132908 傳真：(07)7719959
 花蓮加工廠／花蓮市美七街4號 電話：(03)8234061~3 傳真：(03)8232386

HEAD OFFICE/106 SEC, 2 CHANG MEI RD., HOMEI, CHANG HWA, TAIWAN, R.O.C
 P.O.BOX NO. 23/118 CHANG HWA. TAIWAN
 TEL:886-4-7355142 FAX:886-4-7353802
 FOREIGN DIV.: TEL:886-4-7361445-6 FAX:886-4-7353802
 E-mail address:sanwuex@ms15.hinet.net http://www.sanwu.com.tw