


SWR

SAN WU RUBBER
MFG. CO. LTD.

綠色輸送帶
Green
Conveyor
Belt

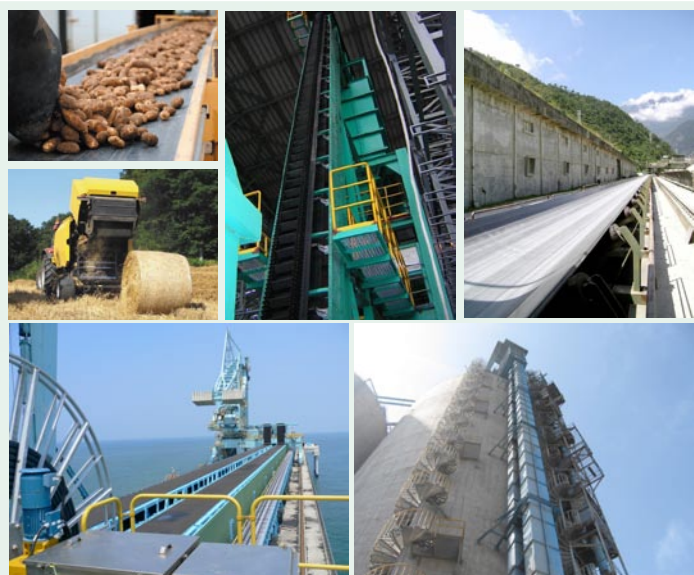

SANWU 

綠色輸送帶


Green Conveyor Belt

Green conveyor belts are widely used in a variety of light purpose conveyor systems: Footwear, packaging and electronic parts conveyor production system. The special cover is designed to prevent the transported materials from being scraped and contaminated by the color of the belt. The non-reflective green surface cover can reduce eye fatigue. GB100 green conveyor belts use a bare back rubber cover design and a special fabric carcass to lower friction between other conveyor components and allow the use of small diameter pulley conveyor systems.

綠色輸送帶廣泛地應用於各種輕便型輸送系統，例如：製鞋，包裝和電子工廠的輸送生產線，採用特殊設計的面膠材質，於輸送時不易發生因摩擦導致輸送物外觀被輸送帶的顏色所污染，同時綠色不反光的面膠也可減輕工作人員眼睛的疲勞。GB100型綠色輸送帶則採用無背面膠設計並使用特殊的布層心體，大幅降低輸送帶與其他輸送元件的摩擦，特別適用於輪徑較小的輸送系統。


SPECIFICATIONS AND TECHNICAL DATA

GC100 2 PLY COVER 1.6mm X COVER 1.6mm

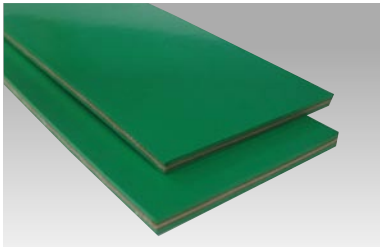


OAG.	5.2mm
COMPOUND	SBR / NR
FABRIC	Synthetic
AMBIENT TEMP.	0 ~ 100 ℃
WORKING TENSION	16 kg / cm
MIN. PULLEY Dia.	75mm

GC105 2 PLY COVER 0.8mm X COVER 0.8mm

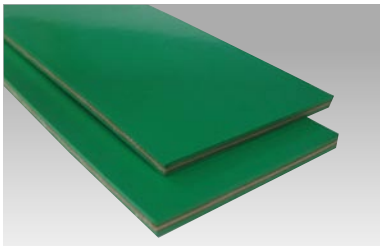

OAG.	3.6mm
COMPOUND	SBR / NR
FABRIC	Synthetic
AMBIENT TEMP.	0 ~ 100 ℃
WORKING TENSION	16 kg / cm
MIN. PULLEY Dia.	75mm

GB100 2 PLY COVER 0.6mmX BARE

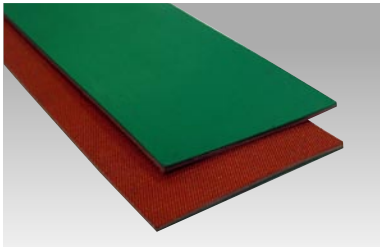

OAG.	2.6mm
COMPOUND	SBR / NR
FABRIC	Synthetic
AMBIENT TEMP.	0 ~ 100 ℃
WORKING TENSION	16 kg / cm
MIN. PULLEY Dia.	50mm



SAN WU RUBBER MFG. CO., LTD.
三五橡膠廠股份有限公司

No. 106, Section 2 Chang Mei Road, Hemei,
Changhua County, Taiwan
台灣 彰化縣和美鎮彰美路二段106號
T 886.4.7361445-6
F 886.4.7365900
E global.trade@sanwu.com.tw
www.sanwu.com.tw

